

Proving endpoint dependence in solving interval parametric linear systems

Evgenija D. Popova

Received: date / Accepted: date

Abstract Linear algebraic systems involving linear dependencies between interval valued parameters and the so-called united parametric solution set of such systems are considered. The focus is on systems, such that the vertices of their interval hull solution are attained at particular endpoints of some or all parameter intervals. An essential part of finding this endpoint dependence is an initial determination of the parameters which influence the components of the solution set, and of the corresponding kind of monotonicity. In this work we review a variety of interval approaches for the initial monotonicity proof and compare them with respect to both computational complexity and monotonicity proving efficiency. Some quantitative measures are proposed for the latter. We present a novel methodology for the initial monotonicity proof, which is highly efficient from a computational point of view, and which is also very efficient to prove the monotonicity, for a wide class of interval linear systems involving parameters with rank one dependency structure. The newly proposed method is illustrated on some numerical examples and compared to other approaches.

Keywords interval linear systems · data dependencies · interval hull solution · monotonicity · parameterized solution

Mathematics Subject Classification (2000) 65G40 · 15A06 · 15B99

This work is supported by the Grant No BG05M2OP001-1.001-0003, financed by the Bulgarian Operational Programme “Science and Education for Smart Growth” (2014-2020) and co-financed by the European Union through the European structural and investment funds.

E.D. Popova
Institute of Mathematics and Informatics, Bulgarian Academy of Sciences
Acad. G. Bonchev str., block 8, 1113 Sofia, Bulgaria
Tel.: +359-889662835
Fax: +359-2-9713649
E-mail: epopova@math.bas.bg

1 Introduction

This paper deals with the solution of linear algebraic systems involving dependencies between interval-valued parameters.

Denote by $\mathbb{R}^{m \times n}$ the set of real $m \times n$ matrices. Vectors are considered as one-column matrices. A real compact interval is $\mathbf{a} = [a^-, a^+] := \{a \in \mathbb{R} \mid a^- \leq a \leq a^+\}$ and $\mathbb{IR}^{m \times n}$ denotes the set of interval $m \times n$ matrices. We consider systems of linear algebraic equations having affine-linear uncertainty structure

$$\begin{aligned} A(p)x &= a(p), \quad p \in \mathbf{p} \in \mathbb{IR}^K, \\ A(p) &:= A_0 + \sum_{k=1}^K p_k A_k, \quad a(p) := a_0 + \sum_{k=1}^K p_k a_k, \end{aligned} \quad (1)$$

where $A_k \in \mathbb{R}^{n \times n}$, $a_k \in \mathbb{R}^n$, $k = 0, \dots, K$ and the parameters $p = (p_1, \dots, p_K)^\top$ are considered to be uncertain and varying within given non-degenerate¹ intervals $\mathbf{p} = (\mathbf{p}_1, \dots, \mathbf{p}_K)^\top$. Nonlinear dependencies between interval valued parameters in linear algebraic systems are often linearized to the form (1) and methods for the latter are applied to bound the corresponding solution set. The united parametric solution set of the system (1), which is considered most often, is defined by

$$\Sigma_{\text{uni}}^p = \Sigma_{\text{uni}}(A(p), a(p), \mathbf{p}) := \{x \in \mathbb{R}^n \mid (\exists p \in \mathbf{p})(A(p)x = a(p))\}. \quad (2)$$

For a nonempty and bounded set $\Sigma \subset \mathbb{R}^n$, its interval hull $\square\Sigma$ is defined by

$$\square\Sigma := \bigcap \{\mathbf{x} \in \mathbb{IR}^n \mid \Sigma \subseteq \mathbf{x}\}.$$

Since obtaining exact bounds for the solution of an interval linear system is an NP-hard problem [20], a variety of interval methods are developed to deliver efficiently an interval vector $\mathbf{x} \supseteq \Sigma_{\text{uni}}^p$ and the quality of the latter enclosure is measured with respect to the sharpest enclosure $\square\Sigma_{\text{uni}}^p$ which is the ultimate goal.

The focus of the present research is parametric united solution sets (2) which possess the so-called endpoint property.

Definition 1 A parametric united solution set (2) possesses the endpoint property if the vertices of its interval hull are attained at particular endpoints of the parameter intervals.

Graphical presentations of solution sets with this property can be found in [16, Example 5.2] and Fig. 1. The endpoint property is possessed partly if the vertices of the interval hull solution $\square\Sigma_{\text{uni}}^p$ are attained for particular endpoints of some (not all) parameter intervals. Graphical presentations of such solution sets can be found in [16, Examples 4.1 and 4.2]. Note that the endpoint property of the solution set is possessed (fully or partly) by a very wide class of interval parametric linear systems. This property is proven in [11] for

¹ An interval $\mathbf{a} = [a^-, a^+]$ is degenerate if $a^- = a^+$.

parametric linear systems involving rank one uncertainty structure. More generally, this property follows if the boundary of a parametric united solution set has a linear shape. Furthermore, the boundary of a united parametric solution set may involve hypersurfaces which are nonlinear and the endpoint property might hold true, see [16, Example 5.1]. If the endpoint property of a solution set holds true with respect to all (or some of the) interval parameters, one can obtain the best interval solution enclosure $\square\Sigma_{\text{uni}}^p$ if the endpoint dependence is known (or a solution enclosure which is sharper than the enclosure obtained by methods not accounting for the endpoint property). In other words, it is possible to obtain a better solution than usual if the endpoints that generate the lower/upper bounds of the interval hull (component by component) are known. The ultimate goal of most scientific and applied problems (an interval solution enclosure which is most close to $\square\Sigma_{\text{uni}}^p$) highlights the importance of the basic problem considered in this work: to prove that the vertices of the exact interval hull of a parametric united solution set are attained at particular endpoints of the parameter intervals and during this proof to find which endpoints of the parameter intervals generate the lower/upper bounds of the interval hull components. Usually, the endpoint property and the endpoint dependence are considered simultaneously by interval numerical methods.

J. Rohn was the first who proposed to exploit monotonic influence of the interval parameters on the parametric solution set for its sharper interval enclosure, cf. [18]. This approach was further developed in [3], [10]. In [1], Ganesan et al. developed analytical methods to find the monotonic dependence of the solution components on the rank one interval parameters involved in the system. Both the numerical approach, initially proposed by Rohn, and the analytic one in [1] are based on determining the sign of the partial derivatives of Σ_{uni}^p with respect to interval parameters. The numerical proof of the endpoint dependence is in general an iterative process, it may involve proving both global and local monotonicity and at each iteration requires solving interval parametric linear systems, cf. [10]. An essential part of proving the endpoint dependence is the first iteration, where the initial monotonic dependence of the solution components on some interval parameters is proven. The efficiency of the initial monotonicity proof in the first iteration has various aspects discussed with more details in Section 2. An essential improvement in the computational complexity of the initial monotonicity proof is proposed in [12]. Recently, an attempt to compare three approaches for the initial monotonicity proof is done in [22].

The goal of the present work is two-fold:

1. to propose a new approach for the initial monotonicity proof (finding the endpoint dependence), which is highly efficient, both computationally and for proving the monotonicity, for interval parametric linear systems involving true rank one interval parameters²;
2. to provide enhanced analysis and comparison of the methodologies for proving the initial monotonic dependence.

² True rank one parameters are defined in [13].

The paper is organized as follows. In Section 2 we discuss several aspects of the initial monotonicity proof. This motivates different approaches for implementing the latter, that will be compared in Section 4. Section 3.1 recalls three different methods for obtaining a parameterized enclosure of a united parametric solution set. These methods will be part of the numerical comparisons done in Section 4 and provide a background for a novel initial monotonicity proving method presented in Section 3.2. The new approach efficiently utilizes a parameterized solution in a single monotonicity proving procedure, which fully accounts for the dependencies on the interval parameters in the partial derivatives. In Section 4 we propose various measures for the efficiency of the initial monotonicity proof of a given approach. In this section we discuss five monotonicity proving approaches, some of them in two versions, and compare them on some numerical examples. The article ends by some conclusions.

2 Aspects of the initial monotonicity proof

We consider the system (1). If $A(p)$ is invertible, then the solution of the parametric system, $x(p) = (A(p))^{-1}a(p)$, is a real-valued function of the parameters p . If, in addition, $A(p)$ is nonsingular for each $p \in \mathbf{p}$, then the solution set Σ_{uni}^p is bounded, respectively the range of $x_i(p)$ is bounded on \mathbf{p} . If a solution component i of a bounded solution set is monotonic with respect to all parameters p , then the lower and upper bounds of $(\square \Sigma_{\text{uni}}^p)_i$ are attained at respective endpoints of \mathbf{p} corresponding to the type of monotonicity. Proving monotonic dependence of Σ_{uni}^p with respect to a parameter p_k , $k = 1, \dots, K$, can be done by enclosing the united solution set of the following interval parametric system of partial derivatives

$$A(p) \frac{\partial x(p)}{\partial p_k} = \frac{\partial a(p)}{\partial p_k} - \frac{\partial A(p)}{\partial p_k} x(p), \quad p \in \mathbf{p}. \quad (3)$$

Let

$$\mathbf{z}_k := \left[\frac{\partial x(p)}{\partial p_k} \right] \supseteq \Sigma_{\text{uni}}^p((3)). \quad (4)$$

If $0 \notin \left[\frac{\partial x(p)}{\partial p_k} \right]_i$, then $x_i(p)$ is monotonic with respect to p_k in \mathbf{p} , and $\text{sign}(\mathbf{z}_{k,i})$ gives the type of monotonicity. If $0 \in \left[\frac{\partial x(p)}{\partial p_k} \right]_i$, the monotonic dependence cannot be proven, although it may exist. Due to overestimation in the interval enclosures (4), monotonic dependence of some solution components with respect to some interval parameters might not be proven. As discussed and illustrated in [10], proving endpoint dependence (called there global and local monotonicity) is an iterative process. Therefore, we call the first solving of systems (3) *initial monotonicity proof*.

Since $x(p)$ in (3) is not known, it is usually estimated by an outer interval enclosure $\mathbf{x} \supseteq \Sigma_{\text{uni}}^p((1))$ of the initial interval parametric system (1). The quality of the enclosure for x determines the quality of the enclosure for z , thus,

influences the proof of monotonic dependence. Also, in \mathbf{x} the dependence on the parameters p is implicit, which may lead to an overestimation in the enclosure provided by \mathbf{z}_k resulting in a failure of the monotonicity proof. Therefore, various modifications and alternative approaches aiming at a sharp interval enclosure of $\frac{\partial x(p)}{\partial p_k}$, that eventually could prove monotonicity, are proposed, cf. [4], [22]. These approaches have different computational complexities and different efficiencies in the monotonicity proof.

It was proposed in [4] and studied in [22] that an interval enclosure for the following interval parametric linear system

$$\begin{pmatrix} A(p) & 0 \\ \frac{\partial A(p)}{\partial p_k} & A(p) \end{pmatrix} \begin{pmatrix} x \\ \frac{\partial x}{\partial p_k} \end{pmatrix} = \begin{pmatrix} a(p) \\ \frac{\partial a(p)}{\partial p_k} \end{pmatrix}, p \in \mathbf{p} \quad (5)$$

for each $k = 1, \dots, K$, provides a better assessment of the monotonic dependence than the other considered methods.

Usually, the interval methods (providing interval enclosure of $\square \Sigma_{\text{uni}}^p$) generate numerical interval vectors that contain the solution set and its interval hull. A new type of solution, $x(p, r)$, called parameterized or p -solution, is proposed in [5]. This solution is in the form of an affine-linear function of $K + n$ interval-valued parameters

$$x(p, r) = \tilde{x} + V(\check{p} - p) + r, \quad p \in \mathbf{p}, r \in \mathbf{r} = [-\hat{r}, \hat{r}], \quad (6)$$

where $\tilde{x}, \hat{r} \in \mathbb{R}^n$, $\check{p} \in \mathbf{p}$, $V \in \mathbb{R}^{n \times K}$ will be precisely defined below for each method. Some representations move \tilde{x} into the interval vector \mathbf{r} and consider the parameters p, r varying independently within the interval $[-1, 1]$. The parameterized solutions have the properties

$$\Sigma_{\text{uni}}^p \subseteq \{x(p, r) \mid p \in \mathbf{p}, r \in \mathbf{r}\}, \quad (7)$$

$$\square \Sigma_{\text{uni}}^p \subseteq x(\mathbf{p}, \mathbf{r}), \quad (8)$$

where $x(\mathbf{p}, \mathbf{r})$ is the interval evaluation of $x(p, r)$. There are various approaches to find a parameterized solution depending on $K + n$ parameters, see, for example, [21] and the references given therein. Theorem 1 in Section 3 recalls the simplest single step method for obtaining the p, r -solution to an united parametric solution set Σ_{uni}^p . In [22] the authors consider proving the initial monotonic dependence by solving the derivative systems (3), where $x(p)$ is replaced by a parameterized solution (6) depending on $K + n$ interval parameters. In [22], both the initial parameterized solution $x(p, r)$ and the interval enclosures of the derivative systems (3) are obtained by the computationally heaviest methods based on affine arithmetic. In this work (Section 4) we compare the initial monotonicity proving approach based on three different forms of parameterized solutions, none of them applying affine arithmetic.

For all $k = 1, \dots, K$, the interval parametric systems (3) have the same interval parametric matrix. Therefore, it is proposed in [12] that the initial proof of monotonic dependence be done by solving one interval parametric matrix equation

$$A(p)Z(p) = B(p), \quad p \in \mathbf{p}, \quad (9)$$

where $Z(p), B(p) \in \mathbb{R}^{n \times K}$ and $\frac{\partial x(p)}{\partial p_k}, \frac{\partial a(p)}{\partial p_k} - \frac{\partial A(p)}{\partial p_k} x(p)$ are the k -th columns of $Z(p)$ and $B(p)$ respectively. Thus, solving one matrix equation will save $K - 1$ inversions of the same matrix when solving separately K systems (3). A numerical example in Section 4 will demonstrate the huge difference. Therefore, in this work all initial monotonicity proving methods, except the one based on (5), are implemented by solving one interval parametric matrix equation.

Since all the proposed approaches for proving monotonic dependence reduce to solving (other) interval parametric linear systems, the efficiency, in terms of the width of the enclosure, of these approaches will depend on the quality of the numerical interval methods used for solving interval parametric linear systems (or matrix equations), referred here as interval parametric solvers. The different interval parametric solvers have different computational complexities and the quality of the enclosure they provide often depends on the structure of the parameter dependencies. In this work we illustrate the application of two kinds of parametric solvers: one based on the single-sided strong regularity condition (11), and another based on a more general double-sided strong regularity condition (15). A comparison between the two kinds of parametric solvers is done in [13]. In Section 4 we only discuss the application of these solvers in the initial monotonicity proof.

3 New approach for finding monotonic dependency

3.1 Background

For $\mathbf{a} = [a^-, a^+]$, define its mid-point $\tilde{a} := (a^- + a^+)/2$, the radius $\hat{a} := (a^+ - a^-)/2$ and the magnitude $|\mathbf{a}| := \max\{|a^-|, |a^+|\}$. These functions are applied to interval vectors and matrices componentwise. The inequalities are understood componentwise. The spectral radius of a matrix $A \in \mathbb{R}^{n \times n}$ is denoted by $\varrho(A)$. The identity matrix of appropriate dimension is denoted by I . For $A_k \in \mathbb{R}^{n \times m}$, $1 \leq k \leq t$, $(A_1, \dots, A_t) \in \mathbb{R}^{n \times tm}$ denotes the matrix obtained by putting side by side the columns of the matrices A_k . Denote the i -th column of $A \in \mathbb{R}^{n \times m}$ by $A_{\bullet i}$ and its i -th row by $A_{i\bullet}$. For an interval matrix $\mathbf{A} = [I - \Delta, I + \Delta] \in \mathbb{IR}^{n \times n}$ with $\varrho(\Delta) < 1$, [19, Theorem 4.4] determines the inverse interval matrix $\mathbf{H} = [\underline{H}, \overline{H}] = [\min\{A^{-1} \mid A \in \mathbf{A}\}, \max\{A^{-1} \mid A \in \mathbf{A}\}]$ by

$$\begin{aligned} \overline{H} &= (\overline{h}_{ij}) = (I - \Delta)^{-1}, \\ \underline{H} &= (\underline{h}_{ij}), \quad \underline{h}_{ij} = \begin{cases} -\overline{h}_{ij} & \text{if } i \neq j, \\ \frac{\overline{h}_{jj}}{2\overline{h}_{jj} - 1} & \text{if } i = j \end{cases}. \end{aligned} \quad (10)$$

The following theorem, modified from [6, Theorem 1], recalls the simplest single step method for obtaining a parameterized solution enclosing Σ_{uni}^p .

Theorem 1 ([6, Theorem 1]) *Let $\check{A} = A(\check{p})$ be nonsingular. Denote $\check{x} = (\check{A})^{-1} a(\check{p})$, $F = (a_1, \dots, a_K)$, $G = (A_1 \check{x}, \dots, A_K \check{x})$, $B^0 = (\check{A})^{-1} (F - G)$.*

Assume that

$$\varrho \left(\sum_{i=1}^K \left| (\check{A})^{-1} A_i \right| \hat{p}_i \right) < 1. \quad (11)$$

The united p, r -solution $x(p, r)$ of the system (1) exists and is determined by

$$x(p, r) = \check{x} + V(\check{p} - p) + r, \quad p \in \mathbf{p}, \quad r \in [-\hat{r}, \hat{r}] \in \mathbb{IR}^n, \quad (12)$$

where $V = \check{H}B^0$, $\hat{r} = \hat{H}|B^0|\hat{p}$, and \check{H} , \hat{H} are the midpoint and radius matrices, respectively, of the inverse interval matrix $\mathbf{H} = [\underline{H}, \overline{H}]$ obtained by (10) for $\Delta = \sum_{i=1}^K \left| (\check{A})^{-1} A_i \right| \hat{p}_i$.

In [13] the condition (11) is called single-sided strong regularity condition.

We consider another form of the parametric system (1). Let $\mathcal{K} = \{1, \dots, K\}$ and π', π'' be two subsets of \mathcal{K} such that $\pi' \cap \pi'' = \emptyset$, $\pi' \cup \pi'' = \mathcal{K}$, $\text{Card}(\pi') = K_1$. The indices of the parameters that appear in both the matrix and the right-hand side of the system are involved in π' , while π'' involves the indices of the parameters that appear only in $a(p)$ of (1). For $p_\pi = (p_{\pi_1}, \dots, p_{\pi_K})$, D_{p_π} denotes a diagonal matrix with diagonal vector p_π . For every parameter p_k , $k \in \pi'$, we consider a full rank factorization of its coefficient matrix $A_k \in \mathbb{R}^{n \times n}$

$$A_k = L_k R_k, \quad L_k \in \mathbb{R}^{n \times \gamma_k}, \quad R_k \in \mathbb{R}^{\gamma_k \times n}, \quad \gamma_k = \text{rank}(A_k). \quad (13)$$

Also, $p_k A_k = L_k D_{g_k(p_k)} R_k$, where $g_k(p_k) = (p_k, \dots, p_k)^\top \in \mathbb{R}^{\gamma_k}$. We define $\gamma = \sum_{k=1}^{K_1} \gamma_k$, $g(p_{\pi'}) = \left(g_1^\top(p_{\pi'_1}), \dots, g_{K_1}^\top(p_{\pi'_{K_1}}) \right)^\top$, $L = (L_1, \dots, L_{K_1}) \in \mathbb{R}^{n \times \gamma}$, $R = (R_1^\top, \dots, R_{K_1}^\top)^\top \in \mathbb{R}^{\gamma \times n}$. A numerical vector $t \in \mathbb{R}^\gamma$ is chosen so that $\sum_{k \in \pi'} p_k a_k = L D_{g(p_{\pi'})} t$, (for example, by solving the latter equation with respect to t), and $F \in \mathbb{R}^{n \times \text{Card}(\pi'')}$ is such that $a(p) = a_0 + L D_{g(p_{\pi'})} t + F p_{\pi''}$. Then, the system (1) has the following equivalent form

$$(A_0 + L D_{g(p_{\pi'})} R) x = a_0 + L D_{g(p_{\pi'})} t + F p_{\pi''}, \quad p \in \mathbf{p}. \quad (14)$$

For each parameter $g_i = (g(p_{\pi'}))_i$, its coefficient matrix $A_i = L_{\bullet i} R_{i \bullet}$ has rank one. Although the coefficient matrices A_k in (1) may not have rank one in general, some sufficient conditions for regularity of an interval parametric matrix are based on its approximation by another matrix with rank one uncertainty structure, cf. [13]. The latter means that each instance of the parameter p_i is cloned as a separate parameter, in the diagonal matrix D , and each of these clones is considered independently. We assume that (14) provides an equivalent, optimal, rank one representation (cf. [13], [14, Definition 1]) of either $A(p_{\pi'}) - A_0$, or of $A^\top(p_{\pi'}) - A_0^\top$. Every interval parametric linear system (1) has an equivalent, optimal, rank one representation (14) and there are various ways to obtain it, cf. [9], [13]. The representation (14) of the system (1) is closely related to the monotonicity properties of the parametric united solution set and is a background for the newly proposed monotonicity proving approach.

Theorem 2 ([13]) Let (14) be an equivalent, optimal, rank one representation of the system (1) and let the matrix $A(\check{p})$ be nonsingular. Denote $C = (A(\check{p}))^{-1}$ and $\check{x} = Ca(\check{p})$. If

$$\varrho(|(RCL)D_{g(\check{p}_{\pi'} - p_{\pi'})}|) < 1, \quad (15)$$

then

- (i) $\Sigma_{\text{uni}}(A(p), a(p), \mathbf{p})$ and the united solution set $\Sigma_{\text{uni}}((16))$ of the interval parametric linear system

$$(I - RCLD_{g(\check{p}_{\pi'} - p_{\pi'})})y = R\check{x} - RCF(\check{p}_{\pi''} - p_{\pi''}) - RCLD_{g(\check{p}_{\pi'} - p_{\pi'})}t, \quad p \in \mathbf{p} \quad (16)$$

are bounded,

- (ii) $\mathbf{y} \supseteq \Sigma_{\text{uni}}((16))$ is computable by methods that require (11) (cf. [13]),
 (iii) every $x \in \Sigma_{\text{uni}}(A(p), a(p), \mathbf{p})$ satisfies

$$x \in \check{x} - (CF)[- \hat{p}_{\pi''}, \hat{p}_{\pi''}] + (CL)(D_{g([- \hat{p}_{\pi'}, \hat{p}_{\pi'}])}|\mathbf{y} - t|). \quad (17)$$

The condition (15) is called in [13] double-sided strong regularity condition. Its proof is based on the Woodbury formula [23]. Note also, that equation (16) is obtained from equation (14) by the substitution $y = Rx$. Theorem 2 is a background of Theorem 3 which presents two different parameterized solutions to the system (14) and summarizes the results of [14, Theorem 4] and [15, Theorem 3].

Theorem 3 Let (14) be an equivalent, optimal, rank one representation of the system (1) and let the matrix $A(\check{p})$ be nonsingular. Denote $C = (A(\check{p}))^{-1}$ and $\check{x} = Ca(\check{p})$. If the condition (15) holds true, then

- (i) there exists an united parameterized solution of the system (1), respectively the system (14),

$$x(p) = \check{x} - (CF)(\check{p}_{\pi''} - p_{\pi''}) + (CLD_{|\mathbf{y}-t|})g(\check{p}_{\pi'} - p_{\pi'}), \quad p \in \mathbf{p}, \quad (18)$$

where $\mathbf{y} \supseteq \Sigma_{\text{uni}}((16))$ is computable by methods that require (11);

- (ii) there exists an united parameterized solution of the system (1), respectively the system (14),

$$x(p, r) = \check{x} - (CF)(\check{p}_{\pi''} - p_{\pi''}) + (CLD_{\check{y}-t})g(\check{p}_{\pi'} - p_{\pi'}) + r, \quad p \in \mathbf{p}, r \in \mathbf{r} = [-\hat{r}, \hat{r}], \quad (19)$$

where $\check{y} = R\check{x}$, $\mathbf{y} \supseteq \Sigma_{\text{uni}}((16))$ is computable by methods that require (11), and $\hat{r} = |CL|D_{|\mathbf{y}-\check{y}|}g(\hat{p}_{\pi'})$.

- (iii) with the same \mathbf{y} used in (17), (18), (19), interval evaluation $x(\mathbf{p})$ of $x(p)$ (18) is equal to the interval evaluation $x(\mathbf{p}, \mathbf{r})$ of $x(p, r)$ (19), and to the interval vector \mathbf{x} obtained by Theorem 2.

Although it is obtained by a better enclosure method, the parameterized solution (19) is similar to that of Theorem 1. For parametric systems involving only rank one interval parameters the parameterized solution (18) depends only on the initial K interval parameters, while (19) depends on $K + n$ interval parameters, thus the latter one is greater than the former one.

3.2 Main result

Proposition 1 *With the notation of Theorem 3, if (15) holds true, then*

$$\square \Sigma_{\text{uni}}((16)) \subseteq y^{(1)}(\mathbf{p}, \mathbf{r}) = y^{(2)}(\mathbf{p}), \quad (20)$$

where $y^{(1)}(p, r)$ is the parameterized solution of (16), obtained by Theorem 1, and

$$\begin{aligned} y^{(2)}(p) &= \check{y} + H(B^0(\check{p}_\pi - p_\pi)) \\ &= \check{y} + (H|B^0|)(\check{p}_\pi - p_\pi), \quad p \in \mathbf{p}, \end{aligned}$$

where $B^0 = RC(-F, LD_{\check{y}-t}K)$, $\pi = (\pi'', \pi')$, $K \in \mathbb{R}^{\gamma \times \text{Card}(\pi')}$ is defined by

$$K_{\bullet i} = \frac{\partial g(p_{\pi'})}{\partial p_i}, \quad \text{for every } i \in \pi', \quad (21)$$

and $H = (I - |RCL| D_{g(\hat{p}_{\pi'})})^{-1}$.

Proof We apply Theorem 1 to the interval parametric system (16). The matrix B^0 for this system is

$$B^0 = I(-RC(F, LD_t K) + RC(0, LD_{\check{y}} K)) = RC(-F, LD_{\check{y}-t} K).$$

For $\Delta = |RCL| D_{g(\hat{p}_{\pi'})}$, by (10), we obtain the corresponding inverse interval matrix $[\overline{H}, \underline{H}]$. Theorem 1 implies the existence of

$$y^{(1)}(p, r) = \check{y} + (\check{H}B^0)(\check{p}_\pi - p_\pi) + r, \quad p_\pi \in \mathbf{p}_\pi, r \in [-\hat{r}, \hat{r}], \quad (22)$$

where $\hat{r} = \hat{H}|B^0|\hat{p}_\pi$, with properties (7), (8). From the interval evaluation of (22), that is $y^{(1)}(\mathbf{p}, \mathbf{r}) = \check{y} + [-\hat{y}, \hat{y}]$, where

$$\hat{y} = \check{H}|B^0|\hat{p}_\pi + \hat{H}|B^0|\hat{p}_\pi = \overline{H}|B^0|\hat{p}_\pi,$$

we obtain

$$y^{(2)}(p) = \check{y} + \overline{H}(B^0(\check{p}_\pi - p_\pi)) = \check{y} + (\overline{H}|B^0|)(\check{p}_\pi - p_\pi), \quad p_\pi \in \mathbf{p}_\pi$$

and the relation (20). \square

We use the relation (20) when evaluating partial derivatives of $x(p)$. Consider the function in (18)

$$x(p) = \check{x} - (CF)(\check{p}_{\pi''} - p_{\pi''}) + (CL)(D_{g(\check{p}_{\pi'} - p_{\pi'})}(y(p) - t)), \quad p \in \mathbf{p},$$

where \mathbf{y} is replaced by $y(p) = y^{(2)}(p)$ from Proposition 1,

$$y(p) = \check{y} + H((RC(-F, LD_{\check{y}-t}K))(\check{p}_\pi - p_\pi)), \quad p \in \mathbf{p}.$$

We find the expressions of the partial derivatives of $x(p)$ with respect to each parameter p_i , $i \in \pi$ and evaluate these expressions at \mathbf{p}_π .

For $i \in \pi''$,

$$\frac{\partial x(p)}{\partial p_i} = (CF)e_i + (CL) (D_{g(\tilde{p}_{\pi'} - p_{\pi'})} HRCF e_i),$$

where e_i is the i -th coordinate vector in $\mathbb{R}^{\text{Card}(\pi'')}$. In matrix form

$$\frac{\partial x(p)}{\partial p_{\pi''}} = CF + (CL) (D_{g(\tilde{p}_{\pi'} - p_{\pi'})} (HRCF)).$$

The interval evaluation of the latter is

$$\left. \frac{\partial x(p)}{\partial p_{\pi''}} \right|_{p \in \mathbf{P}} = CF + [-\hat{V}'', \hat{V}''],$$

where $\hat{V}'' = |CL| (g(\hat{p}_{\pi'}) \circ |HRCF|) = |CL| |D_{g(\hat{p}_{\pi'})}| |HRCF|$ and \circ is the componentwise Hadamard product.

For $i \in \pi'$,

$$\frac{\partial x(p)}{\partial p_i} = (CL) (-D_{K_{\bullet \bullet i}}(y(p) - t) - D_{g(\tilde{p}_{\pi'} - p_{\pi'})} HRCLD_{\tilde{y}-t} K e_i),$$

where e_i is the i -th coordinate vector in $\mathbb{R}^{\text{Card}(\pi')}$. In matrix form

$$\frac{\partial x(p)}{\partial p_{\pi'}} = -(CL) ((y(p) - t) \circ K + D_{g(\tilde{p}_{\pi'} - p_{\pi'})} HRCLD_{\tilde{y}-t} K).$$

In order to minimize the number of interval operations in the interval evaluation of the last expression, we rearrange it so that

$$\left. \frac{\partial x(p)}{\partial p_{\pi'}} \right|_{p \in \mathbf{P}} = -CLD_{\tilde{y}-t} K + [-\hat{V}', \hat{V}'], \quad \text{where}$$

$$\begin{aligned} \hat{V}' &= |CL| ((|HRC(-F, LD_{\tilde{y}-t} K)| \hat{p}_{\pi}) \circ K + D_{g(\hat{p}_{\pi'})} |HRCLD_{\tilde{y}-t} K|) \\ &= |CL| ((|HRCF| \hat{p}_{\pi''} + |HRCLD_{\tilde{y}-t} K| \hat{p}_{\pi'}) \circ K + g(\hat{p}_{\pi'}) \circ |HRCLD_{\tilde{y}-t} K|). \end{aligned}$$

Thus, we have proven the following theorem.

Theorem 4 *Let (14) be an equivalent, optimal, rank one representation of the system (1) and let the matrix $A(\tilde{p})$ be nonsingular. Denote $C = (A(\tilde{p}))^{-1}$. If the condition (15) holds true, define interval matrix $\mathbf{M} \in \mathbb{IR}^{n \times K}$ by*

$$\mathbf{M} = C(F, -LD_{\tilde{y}-t} K) + [-\hat{V}, \hat{V}],$$

where K, H are defined in Proposition 1 and

$$\begin{aligned} \hat{V} &= |CL| \left(g(\hat{p}_{\pi'}) \circ |HRCF|, (|HRCF| \hat{p}_{\pi''} + |HRCLD_{\tilde{y}-t} K| \hat{p}_{\pi'}) \circ K + \right. \\ &\quad \left. g(\hat{p}_{\pi'}) \circ |HRCLD_{\tilde{y}-t} K| \right). \end{aligned}$$

Then, for $i = 1, \dots, n$, $j \in \pi$, $\text{sign}(\mathbf{M}_{ij}) \neq 0$ gives the type of global monotonicity of $\Sigma_{\text{uni}, i}((1))$ with respect to p_{π_j} .

In the special case of rank one interval parameters $K = I$ and

$$\begin{aligned}\hat{V}' &= |CL|(|HRC(-F, LD_{\hat{y}-t})|\hat{p}_\pi) \circ I + g(\hat{p}_{\pi'}) \circ |HRCLD_{\hat{y}-t}| \\ &= |CL| \left(D_{|HRC(-F, LD_{\hat{y}-t})|\hat{p}_\pi} + D_{g(\hat{p}_{\pi'})} |HRCLD_{\hat{y}-t}| \right).\end{aligned}$$

The following example presents in details the numerical computations based on the theoretical results of this section.

Example 1 Consider the following parametric linear system

$$\begin{pmatrix} 1+p_1-p_2, & -p_1+p_2, & 1+p_1 \\ 2+p_1+p_2, & -1-p_1-p_2-p_3, & -1+p_1-2p_3 \\ 1+p_1, & -3-p_1-2p_3, & 6+p_1+4p_3 \end{pmatrix} x = \begin{pmatrix} 1 \\ 1 \\ 1 \end{pmatrix} \quad (23)$$

with $p_i \in \frac{1}{4}[-1, 1]$, $i = 1, 2, 3$. In this system the coefficient matrices of p_1 , p_2 have rank one, while the matrix of p_3 has rank two. An equivalent, optimal, rank one representation (14) of the system is obtained for $\pi' = \{1, 2, 3\}$, $\pi'' = \emptyset$ implying $F = 0$ and omitting the terms involving it, $g(p_{\pi'}) = (p_1, p_2, p_3, p_3)^\top$, $a_0 = (1, 1, 1)^\top$, $t = 0 \in \mathbb{R}^4$ and

$$A_0 = \begin{pmatrix} 1 & 0 & 1 \\ 2 & -1 & -1 \\ 1 & -3 & 6 \end{pmatrix}, \quad L = \begin{pmatrix} 1 & -1 & 0 & 0 \\ 1 & 1 & -1 & -2 \\ 1 & 0 & -2 & 4 \end{pmatrix}, \quad R = \begin{pmatrix} 1 & -1 & 1 \\ 1 & -1 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix}.$$

The spectral radius of the matrix in condition (11) is $\varrho_{(11)} \approx 0.976$, while that in condition (15) is $\varrho_{(15)} \approx 0.582$, showing that (15) will hold true for parameters varying in wider intervals than the condition (11). We apply (as in the proof of Proposition 1) Theorem 1 to the parametric system (16), which involves only column dependencies in the matrix. By $\hat{y} = R.\hat{x} = \frac{1}{14}(9, 6, 5, 3)^\top$,

$$H = \bar{H} = (I - |RCL| D_{g(\hat{p}_{\pi'})})^{-1} = \frac{1}{6081} \begin{pmatrix} 7784 & 9156/5 & 2408 & 3808/5 \\ 1636 & 9432 & 2956 & 1840 \\ 1556 & 20292/5 & 9056 & 5836/5 \\ 826 & 1848 & 868 & 7798 \end{pmatrix},$$

$$K = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \\ 0 & 0 & 1 \end{pmatrix}, \quad B^0 = RC(LD_{\hat{y}}K) = \frac{1}{196} \begin{pmatrix} 81 & 24 & -49 \\ 54 & 72 & -84 \\ 45 & -108 & 49 \\ 27 & -48 & 35 \end{pmatrix},$$

we obtain the parameterized solutions $y^{(1)}(p, r)$ and $y^{(2)}(p)$ of Proposition 1

$$\begin{aligned}y^{(1)}(p, r) &\approx \begin{pmatrix} \frac{9}{14} \\ \frac{3}{7} \\ \frac{5}{14} \\ \frac{3}{14} \end{pmatrix} + \begin{pmatrix} 0.434041 & 0.128605 & -0.262568 \\ 0.31531 & 0.420413 & -0.490482 \\ 0.257367 & -0.61768 & 0.280244 \\ 0.144774 & -0.257376 & 0.18767 \end{pmatrix} (\check{p}_\pi - p_\pi) + \begin{pmatrix} 0.245396 \\ 0.329458 \\ 0.350839 \\ 0.177327 \end{pmatrix} \circ r, \\ p_\pi &\in \mathbf{p}_\pi, \pi = \pi', r_i \in [-1, 1], i = 1, \dots, 4,\end{aligned}$$

$$y^{(2)}(p) = \check{y} + (H|B^0|)(\check{p}_\pi - p_\pi) \\ \approx \frac{1}{14} \begin{pmatrix} 9 \\ 6 \\ 5 \\ 3 \end{pmatrix} + \begin{pmatrix} 0.720135 & 0.516231 & 0.570432 \\ 0.691804 & 0.944675 & 0.907557 \\ 0.657974 & 1.1441 & 0.756577 \\ 0.349285 & 0.520967 & 0.428877 \end{pmatrix} (\check{p}_\pi - p_\pi), \quad \pi = \pi', p \in \mathbf{P},$$

and the relation (20). Then, applying Theorem 4, we obtain

$$\hat{V} = |CL| \left((|HRCLD_{\check{y}}K| \hat{p}_{\pi'}) \circ K + g(\hat{p}_{\pi'}) \circ |HRCLD_{\check{y}}K| \right) \\ = \frac{1}{2979690} \begin{pmatrix} 1487336 & 747981 & 875411 \\ 1560140 & 2074047 & 1504139 \\ 800508 & 928444 & 795130 \end{pmatrix}, \\ -CLD_{\check{y}}K = -\frac{1}{196} \begin{pmatrix} -99 & 36 & 35 \\ -45 & 108 & -49 \\ -27 & 48 & -35 \end{pmatrix}.$$

Thus, the interval matrix $\mathbf{M} = -CLD_{\check{y}}K + [-\hat{V}, \hat{V}]$ of Theorem 4

$$\mathbf{M} \approx \begin{pmatrix} [-1.00426, -0.00594407] & [-0.067353, 0.4347] & [-0.115221, 0.472364] \\ [-0.753183, 0.294] & [-0.145041, 1.24708] & [-0.754797, 0.254797] \\ [-0.40641, 0.1309] & [-0.0666928, 0.556489] & [-0.445421, 0.0882785] \end{pmatrix}$$

has zero involving intervals in all its elements except for \mathbf{M}_{11} , which has negative sign and shows monotone decreasing dependence of the first solution component with respect to p_1 . For the same parametric system (23) with narrower intervals for the parameters Theorem 4 gives the monotonic dependence of more solution components with respect to more parameters, see Example 3 and Fig. 1.

4 Numerical comparisons

In this section we compare the following approaches for finding initial monotonic dependencies:

- Mdx** Finding initial monotonicity by solving one interval parametric matrix equation (9), where $x(p) = \mathbf{x}$ is an initial interval enclosure of the considered system (1). Two versions of this approach are considered – parametric solvers based on: the single-sided regularity condition (11) and on the more efficient double-sided regularity condition (15).
- MK2n** The approach based on the systems (5). The abbreviation MK2n reflects the requirement of this approach to solve K interval parametric linear systems, each of dimension $2n$. The efficiency of this approach in proving monotonic dependencies depends on the quality of the method for solving interval parametric linear systems. Since the parametric matrix $A(p)$ appears twice in the systems that have to be solved, the MK2n method cannot use the advantage of the parametric solvers for matrices with rank

one uncertainty structure. Therefore, the MK2n method seems to have the best proving efficiency for systems with matrices whose radius of single-sided strong regularity is less than the radius of double-sided strong regularity. Another deficiency of the MK2n method is its high computational complexity since the approach of solving one matrix equation for all the parameter dependencies [12] cannot be applied. Thus, for each parameter dependency one has to solve a separate interval parametric linear system of twice bigger dimension.

- MpKsol Proving initial monotonicity by solving one interval parametric matrix equation (9), where $x(p) = x(p, r)$, $p \in \mathbf{p}$, $r \in \mathbf{r}$, is an initial parameterized solution (6) depending on $K + n$ interval parameters for the considered system (1). Obtaining $x(p, r)$ (6) is considered in two forms: one based on Theorem 1 using regularity condition (11) and another based on Theorem 3.(ii) using the more efficient double-sided regularity condition (15).
- MpPsol Proving initial monotonicity by solving one interval parametric matrix equation (9), where $x(p) = x(p, q)$, $p \in \mathbf{p}$, $q \in \mathbf{q}$, is an initial parameterized solution of the considered system (1) obtained by the method of Theorem 3.(i) using the double-sided regularity condition (15).
- Mds The newly proposed method of Theorem 4. This approach combines the two steps of the methods MpKsol and MpPsol into one procedure, which fully accounts for the dependencies on the interval parameters in the partial derivatives.

The first three approaches above are the same as those considered in [22]. Here we apply the computationally more efficient approach [12] of solving one matrix equation for all the parameter dependencies instead of solving K separate parametric systems involving the same matrix, applied in [22]. This difference in the computational efficiency is demonstrated by Example 4. The second difference is in the parametric solvers that are used. Contrary to [22], applying the heaviest parameterized method based on affine arithmetic, we use only interval methods that do not require affine arithmetic. The latter also implies a better computational efficiency. The third major difference is in the presentation of the numerical results. In [22] the results of the initial monotonicity proof are not presented but only the solution enclosures, obtained after applying proven monotonic dependencies, are given. Below we propose several quantitative measures for the efficiency of the monotonicity proving approaches.

Similarly to the radius of applicability of a solver of an interval parametric linear system, we introduce two radiuses ($r_1(\text{Mth})$ and $r_2(\text{Mth})$) of the efficiency of an initial monotonicity proving method, denoted by Mth. We consider system (1), where $p_k \in \mathbf{p}_k = [-1, 1]$, $k = 1, \dots, K$. Let $M \in \{0, 1, -1\}^{n \times K}$ be the sign matrix resulted from an initial monotonicity proving method. We define a radius $r_1(\text{Mth})$ of the initial enclosure (monotonicity proving) efficiency

of the approach Mth by

$$r_1(\text{Mth}) := \operatorname{argmax}_r \{M_{ij} \neq 0 \text{ for exactly one } (ij), \\ i = 1, \dots, n, j = 1, \dots, K \text{ and for } p \in r\mathbf{p}\}.$$

$r_1(\text{Mth})$ corresponds to the maximal radius for the parameters such that exactly one sign in M is known, which means that the monotonicity of one solution component with respect to one parameter is determined. Next, we define an $r_2(\text{Mth})$ radius of the initial enclosure (monotonicity proving) efficiency by

$$r_2(\text{Mth}) := \operatorname{argmax}_r \{0 \notin M \text{ for } p \in r\mathbf{p}\}.$$

$r_2(\text{Mth})$ corresponds to the maximal radius for the parameters such that all signs in M are known, which means that the monotonicity is determined for each solution component with respect to each parameter. In practical applications, the exact values $r_1(\text{Mth})$ and $r_2(\text{Mth})$ are usually approximated by corresponding floating point radii $r = r_{\text{prec}}$, where “prec” denotes the number of decimal digits in the mantissa of r_{prec} . Thus, for a given interval parametric linear system (1) and a specified precision, one can find approximations of $r_1(\text{Mth})$ and $r_2(\text{Mth})$ by subsequently changing the value of r_{prec} . Below, in the numerical examples, we use $\text{prec} = 4$.

For problems of high dimension, involving many interval parameters, we propose the following quantitative measure for the efficiency of a given approach. For an interval parametric linear system (1) with a given radius of parameter uncertainties r , such that $p_k \in \mathbf{p}_k = [-r, r]$, $k = 1, \dots, K$, the quality of an initial monotonicity proving methodology Mth is denoted by $\varepsilon(r, \text{Mth})$. Let $\#_0$ be the number of zero components in the sign matrix M of the monotonic dependencies, proven by Mth, and $\#$ is the total number of the elements in the matrix M . Then,

$$\varepsilon(r, \text{Mth}) := \frac{\# - \#_0}{\#} \in [0, 1].$$

The measure $\varepsilon(r, \text{Mth})$ can be also applied to a row of the sign matrix M . This means that the measure can be applied to problems that require finding monotonic dependence of only one (or some) components of the parametric solution. Obtaining $\varepsilon(r, \text{Mth})$ is exact and does not require additional computational effort.

Example 2 Consider the following interval parametric linear system after [22, Example 3]

$$\begin{pmatrix} 2p_1 & p_2 - 1 & -p_3 & p_2 + 3p_5 \\ p_2 + 1 & 0 & p_1 & p_4 + 1 \\ 2 - p_3 & 4p_2 + 1 & 1 & -p_5 \\ -1 & 2p_5 + 2 & \frac{1}{2} & 2p_1 + p_4 \end{pmatrix} x = \begin{pmatrix} 1 + 2p_3 \\ -p_4 + 2 \\ 3p_4 + p_5 \\ p_1 + p_2 + 2p_5 \end{pmatrix}, \quad p_k \in [0.8 - \delta, 1.1 + \delta], \\ k = 1, \dots, 5.$$

In [22, Example 3], Mdx, MK2n and MpKsol are applied for $\delta = 0.01, 0.02, 0.03, 0.04, 0.05$. Here we have additionally applied the three proposed measures for the efficiency of the considered approaches. Since the system involves parameters whose dependency structure has rank greater than one, all interval parametric solvers are based on the single-sided regularity condition (11). Both Mdx and MpKsol are applied by solving one interval parametric matrix equation (9). It should be mentioned that Mdx yields the same initial monotonicity result for different $\delta = 0.01, 0.02, 0.03$ and the same result for $\delta = 0.04, 0.05$, the latter is mentioned in Table 1. Similarly, MK2n yields the same result for

Table 1 Example 2: efficiency of the considered approaches for finding monotonic dependencies.

method	$r_1(\text{Mth})$	$r_2(\text{Mth})$	$\varepsilon(0.01, \text{Mth})$
Md	0.19	0	19/20
MK2n	$\delta = 0.04, 0.05, 0.06$	$\delta = -0.15$	1
	0.2	0.01	
MpKsol	$\delta = 0.05, 0.06, 0.07$	$\delta = -0.14$	1
	0.2	0.01	
	$\delta = 0.05, 0.06, 0.07$	$\delta = -0.14$	

$\delta = 0.02, 0.03, 0.04$ and the same result for $\delta = 0.05, 0.06, 0.07$. MpKsol yields the same initial monotonicity result for $\delta = 0.02, 0.03, 0.04$ and the same result for $\delta = 0.05, 0.06, 0.07$, the latter is mentioned in Table 1. It is clear that for the particular parametric system and the considered parameter uncertainties, the three compared approaches have similar proving efficiency.

Example 3 Consider the parametric linear system (23) with starting parameter intervals $p_i \in [-1, 1]$, $i = 1, 2, 3$. Note, that none of the conditions (11), (15) holds true for these parameter intervals, which implies $M = 0 \in \mathbb{R}^{n \times K}$. Table 2 clearly presents the initial monotonicity proving efficiency of the three approaches, where the corresponding parametric solvers are based on the single-sided regularity condition (11), which holds true for parameters with smaller interval radiuses. The differences between the three approaches is more pronounced than those in Example 2.

Table 2 Example 3: efficiency of the considered approaches based on the single-sided regularity condition (11).

method	$r_1(\text{Mth})$	$r_2(\text{Mth})$	$\varepsilon(1/9, \text{Mth})$	$\varepsilon(1/11, \text{Mth})$
Mdx	0.098	0.070	0	2/9
MK2n	0.148	0.095	6/9	1
MpKsol	0.123	0.089	2/9	8/9

Since the considered parametric system involves rank one interval parameters, we apply monotonicity proving approaches based on the more efficient

double-sided regularity condition (15). The estimated efficiency of these approaches is presented in Table 3. For the traditional approach $\text{Md}\mathbf{x}$, both the initial interval solution enclosure and the solution enclosure of the derivative matrix equation are based on (15). When applying the approaches MpKsol and MpPsol , the respective two kinds of initial parameterized solution enclosures are based on (15). In the corresponding derivative systems the initial rank one uncertainty structure is changed due to the parameterized solutions in the right-hand sides. This implies that their solutions obtained by methods based on (15) will be overestimated. Therefore, the derivative matrix equation is solved by methods applying (11). Comparing the results in tables 2 and 3 we see that any of the methods based on (15) has a better enclosure efficiency than any of the methods based on (11). Table 3 clearly presents the best monotonicity proving efficiency of the newly proposed method of Theorem 4, which fully utilizes the parameter dependencies.

Table 3 Example 3: efficiency of the considered approaches based on both regularity conditions (15), (11).

method	$r_1(\text{Mth})$	$r_2(\text{Mth})$	$\varepsilon(1/8, \text{Mth})$	$\varepsilon(1/9, \text{Mth})$	$\varepsilon(1/11, \text{Mth})$
$\text{Md}\mathbf{x}$	0.126	0.092	1/9	2/9	1
MpKsol	0.159	0.101	3/9	8/9	1
MpPsol	0.186	0.103	7/9	8/9	1
Mds	0.251	0.138	1	1	1

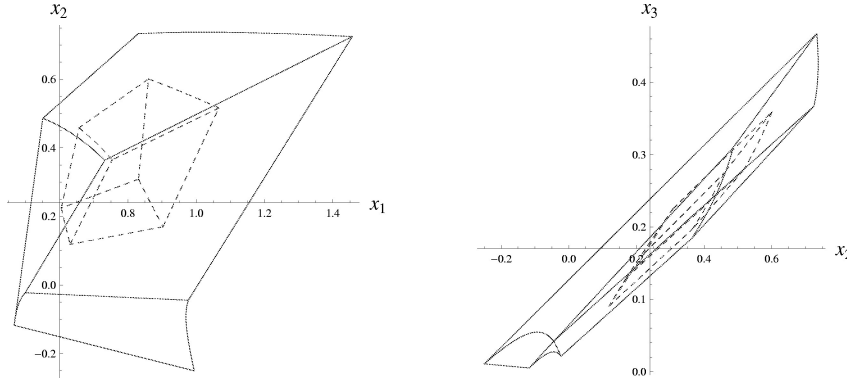


Fig. 1 Projections of the parametric solution sets of system (23) with parameters varying in $0.25[-1, 1]$ (dashed lines) and with parameters varying in $0.45[-1, 1]$ (solid red lines). The nonlinear parts of the boundary of the second solution set are better visible on the x_2x_3 projection.

In the next examples we consider interval parametric linear systems based on a finite element model of a one-bay 20-floor truss cantilever presented in

Fig. 2, after [7]. The structure consists of 42 nodes and 101 elements. The bay

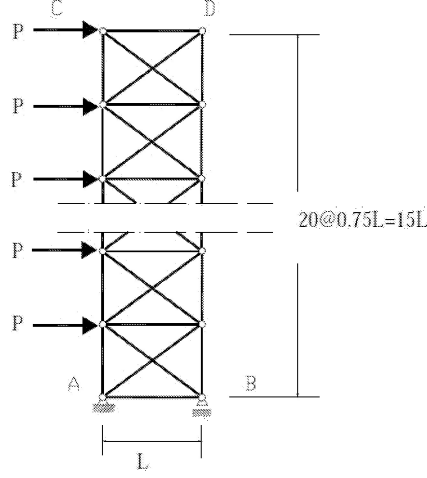


Fig. 2 One-bay 20-floor truss cantilever after [7].

is $L = 1\text{m}$, every floor is $0.75L$, the element cross-sectional area is $A = 0.01\text{ m}^2$, and the crisp value for the element Young modulus is $E = 2 \times 10^8\text{ kN/m}^2$. Twenty horizontal loads with nominal value $P = 10\text{ kN}$ are applied at the left nodes. The boundary conditions are determined by the supports: at A the support is a pin, at B the support is roller. It is assumed that the modulus of elasticity E_k of each element and the external loads are independent interval parameters. This problem is often used as a benchmark problem for the computational efficiency and scalability of various interval methods applied to mechanical structures with complex configuration and a large number of interval parameters, see, e.g., [8], [17], [14]. Since the interval parametric linear system for the unknown displacements at each node has rank one uncertainty structure, by [11, Theorem 2, Proposition 1] the vertices of the interval hull of the unknown displacements are attained at particular endpoints of the interval parameters. Similar properties are verified for interval models of linear DC electric circuits [2,3,11]. However, finding $\square\Sigma_{uni}^p$ by the combinatorial endpoint approach requires solving prohibitively many $2^{101+20} \approx 2.66 \times 10^{36}$ point linear systems for the model of truss cantilever. Therefore, it is of particular practical interest to have computationally feasible methods for obtaining $\square\Sigma_{uni}^p$.

For any interval parametric linear system where some parameters are involved only in the right-hand side, the monotonic dependence of $\square\Sigma_{uni}^p$ on these parameters can be proven first. Thus, these parameters are removed from the subsequent considerations. By the next example we demonstrate the computational advantage of considering one matrix equation for the partial derivatives instead of solving a number of interval parametric linear systems.

Example 4 Consider the interval parametric linear system for the displacements in the model of truss cantilever presented in Fig. 2. It is assumed 6% uncertainty in the modulus of elasticity E_k of each element ($\pm 3\%$ from the corresponding mean value) and 10% uncertainty in each of the loads. The goal is to find the monotonic dependence of the unknown displacements with respect to each of the 20 interval load parameters that appear only in the right hand side of the system.

For proving monotonic dependence of the solution with respect to 20 interval parameters in the right-hand side of the system we solve one interval parametric matrix equation (9) where, due to the lack of dependence, $B(p) \in \mathbb{R}^{81 \times 20}$ is a numerical matrix. This matrix equation is solved by an interval method based on the regularity condition (11). Monotonic dependence of every solution component is proven with respect to each interval parameter, except for five solution components with respect to the first interval parameter. Then, we solve an interval parametric linear system for the solution derivatives with respect to the first parameter by the method of Theorem 2, which finds monotonic dependence for all the solution components. For the sake of comparison of the computing times, we solve 20 separate interval parametric linear systems for the solution derivatives with respect to each of the parameters by the same method used to solve the corresponding matrix equation. Solving 20 separate systems was about 15.6 times slower than solving the interval parametric matrix equation.

Example 5 In this example we compare both the monotonicity proving efficiency and the computational efficiency of the newly proposed method Mds (Theorem 4) with those of the method MpPsol. The latter method showed the best monotonicity proving efficiency in Example 3 compared to the methods Mdx and MpKsol. Consider the interval parametric linear system for the displacements in the model of truss cantilever presented in Fig. 2, and considered also in Example 4 with more interval parameters. Here it is assumed 6% uncertainty in the modulus of elasticity E_k of each element while the twenty external loads are considered deterministic at their nominal value. Thus, we have an interval parametric linear system involving 101 rank one interval parameters E_k in the matrix and a numerical right-hand side vector of dimension 81. The newly proposed method showed monotonicity proving efficiency $\varepsilon(0.03, \text{Mds}) = 6875/8181 \approx 0.8404$. We denote the computing time of this method by Mds_t . The method MpPsol, applied as in Example 3, showed monotonicity proving efficiency $\varepsilon(0.03, \text{MpPsol}) = 5663/8181 \approx 0.6922$ and a computing time $\text{MpPsol}_t \approx 2.6 \text{ Mds}_t$. Thus, the newly proposed initial monotonicity proving method of Theorem 4 demonstrates essentially better computational efficiency and monotonicity proving efficiency in comparison **with** the methods based on explicit parameterized solutions.

5 Conclusion

Proving the dependence of the unknown variables in interval parametric linear systems on particular endpoints of the intervals for the model parameters is a computationally heavy problem of particular importance for many scientific and applied problems. An essential part of this iteration process is the initial proof of monotonic dependence. In this work we analyzed both theoretically and by numerical examples various aspects of different methodological approaches aiming at the initial monotonicity proof. The computational efficiency of some of the considered methods is also analyzed. Some quantitative measures for the efficiency of different monotonicity proving methodologies are proposed. These measures are applied at the numerical comparisons between a variety of initial monotonicity proving approaches and a newly proposed method.

For parametric linear systems involving true rank one interval parameters, which appear in a variety of application domains, we proposed a novel method for proving an initial monotonic dependence of the solution components on the interval parameters. This novel method, presented in Theorem 4, combines the best computational efficiency with the best monotonicity proving efficiency in comparison to all considered approaches.

In [14] the parameterized solution (18) is a basis of a new approach for obtaining sharp bounds for derived quantities (e.g., forces or stresses) which are functions of the displacements (primary variables) in interval finite element models of mechanical structures. A further research could expand the present novel method of Theorem 4, which is also based on (18), in proving monotonic dependence of secondary variables defined by classes of functions depending on the initial interval parameters and the primary unknown variables.

Both, the theoretical discussions and the numerical comparisons, involved in this paper, clearly reveal what are the properties of the initial monotonicity proving approaches. Thus, the end user can choose properly which is the best approach for an application. The following general advises can be given. For problems of small dimension or involving a few interval parameters with relatively small uncertainties, any approach could be applied. If monotonicity should be checked simultaneously for a big number of interval parameters, solving one matrix equation for all partial derivatives [12] is computationally more efficient than solving separate derivative systems. Applying initial parameterized solutions in the right-hand side of the partial derivatives improves the efficiency of the proof. If parameters with rank one uncertainty structure dominate in the considered problem, then the novel approach, proposed in Theorem 4, has the best computational and proving efficiency. In any case, choosing how to prove the monotonic dependence or the endpoint property of a parametric solution should be guided by the properties of the particular problem at hand and by the properties (discussed in this work) of the corresponding methodologies. In order to be informative, any comparisons of the monotonicity proving efficiency of present or future methodologies should involve some of the three quantitative measures proposed in this work.

Acknowledgements

The author thanks the anonymous reviewers for their thorough reviews and the numerous remarks which helped improving the readability of the paper.

References

1. Ganesan, A., Ross, S., Ross Barmish, R.: An extreme point result for convexity, concavity and monotonicity of parametrized linear equation solutions. *LAA* **390**, 61–73 (2004) <https://doi.org/10.1016/j.laa.2004.04.031>
2. Dreyer, A.: Interval Analysis of Analog Circuits with Component Tolerances. PhD thesis, Kaiserslautern Univ. of Technology, Kaiserslautern (2005)
3. Kolev, L.: Worst-case tolerance analysis of linear DC and AC electric circuits. *IEEE Trans. Circuits Syst. I: Fundam. Theory Appl.* **49**(12), 1693–1701 (2002)
4. Kolev, L.: Componentwise determination of the interval hull solution for linear interval parameter systems. *Reliable Computing* **20**, 1–24 (2014)
5. Kolev, L.: Parametrized solution of linear interval parametric systems. *Appl. Math. Comput.* **246**, 229–246 (2014) <https://doi.org/10.1016/j.amc.2014.08.037>
6. Kolev, L.: A direct method for determining a p -solution of linear parametric systems. *J. Appl. Computat. Math.* **5**, 1–5 (2016) <https://doi.org/10.4172/2168-9679.1000294>
7. Muhanna, R.L.: Benchmarks for interval finite element computations, Center for Reliable Engineering Computing, Georgia Tech, USA, (2004) http://rec.ce.gatech.edu/resources/Benchmark_2.pdf (accessed 12 November 2018).
8. Neumaier, A., Pownuk, A.: Linear systems with large uncertainties, with applications to truss structures. *Rel. Comput.* **13**, 149–172 (2007) <https://doi.org/10.1007/s11155-006-9026-1>
9. Piziak, R., Odell, P.L.: Full rank factorization of matrices. *Mathematics Magazine* **72**, 193–201 (1999)
10. Popova, E.D.: Computer-assisted proofs in solving linear parametric problems. In *Proceedings of 12th GAMM-IMACS International Symposium on Scientific Computing, Computer Arithmetic and Validated Numerics (SCAN 2006)*, IEEE Computer Society Press, p. 35 (2007) <https://doi.org/10.1109/SCAN.2006.12>
11. Popova, E.D.: Improved enclosure for some parametric solution sets with linear shape. *Computers and Mathematics with Applications* **68**, 994–1005 (2014) <https://doi.org/10.1016/j.camwa.2014.04.005>
12. Popova, E.D.: Enclosing the solution set of parametric interval matrix equation $A(p)X = B(p)$, *Numer. Algorithms* **78**, 423–447 (2018) <https://doi.org/10.1007/s11075-017-0382-1>
13. Popova, E.D.: Rank one interval enclosure of the parametric united solution set, *BIT Numer. Math.* **59**(2), 503–521 (2019) <https://doi.org/10.1007/s10543-018-0739-4>
14. Popova, E.D.: New parameterized solution with application to bounding secondary variables in FE models of structures, *Applied Mathematics and Computation* **378**, 125205 (2020) <https://doi.org/10.1016/j.amc.2020.125205>
15. Popova, E.D.: On a class of parameterized solutions to interval parametric linear systems, arXiv:1906.00613 (2019) to appear in *C. R. Acad. Bulg. Sci.*
16. Popova, E.D., Krämer, W.: Visualizing parametric solution sets, *BIT Numerical Mathematics* **48**(1), 95–115 (2008) <https://doi.org/10.1007/s10543-007-0159-3>
17. Rama Rao, M.V., Mullen, R.L., Muhanna, R.L.: A new interval finite element formulation with the same accuracy in primary and derived variables. *Int. J. Reliability and Safety* **5** 336–357 (2011) <https://doi.org/10.1504/IJRS.2011.041184>
18. Rohn, J.: Linear interval equations with dependent coefficients. Symposium “Interval Methods for Numerical Computations”, Oberwolfach, 1990. In: Rohn, J.: A method for handling dependent data in interval linear systems. Technical Report No. 911, Institute of Computer Science, Academy of Science of the Czech Republic, Prague (2004) <https://asepactivenode.lib.cas.cz/ar1-cav/en/contapp/?repo=crepo1&key=20925094170> (Accessed February 13, 2019)

-
19. Rohn, J.: Explicit inverse of an interval matrix with unit midpoint. *Electronic Journal of Linear Algebra* **22**, 138–150 (2011) <https://doi.org/10.13001/1081-3810.1430>
 20. Rohn, J., Kreinovich, V.: Computing exact componentwise bounds on solutions of linear systems with interval data is NP-hard, *SIAM J. Matrix Anal. Appl.* **16**(2), 415–420 (1995)
 21. Skalna, I., Hladík, M.: A new method for computing a p -solution to parametric interval linear systems with affine-linear and nonlinear dependencies, *BIT Numer. Math.* **57**(4), 1109–1136 (2017)
 22. Skalna, I., Hladík, M.: Enhancing monotonicity checking in parametric interval linear systems. In: Martel, M., et al. (Eds) *Trusted Numerical Computations (TNC'18)*, *Kalpa Publications in Computing*, vol. 8, pp. 70–83 (2018) <https://doi.org/10.29007/1vkp>
 23. Woodbury, M.A.: Inverting Modified Matrices. Memorandum Report 42, Statistical Research Group. Princeton University, Princeton (1950)